

## SG\_D-1W & SH\_D-1W Series

1W, FIXED INPUT, 6000V ISOLATED & UNREGULATED DUAL/SINGLE OUTPUT DC-DC CONVERTER

multi-country patent protection



### FEATURES

- 6KVDC Isolation
- DIP Package
- Temperature Range: -40°C to +85°C
- No Heatsink Require
- No External Component Require
- Industry Standard Pinout
- RoHS Compliance

### APPLICATIONS

The SG/SH\_D1W Series are specially designed for applications where a group of polar power supplies are isolated from the input power supply in a distributed power supply system on a circuit board.

These products apply to:

- 1) Where the voltage of the input power supply is fixed (voltage variation  $\leq \pm 10\%$ );
- 2) Where isolation is necessary between input and output (isolation voltage  $\leq 6000\text{VDC}$ );
- 3) Where the regulation of the output voltage and the output ripple noise are not demanded.


Such as: purely digital circuits, ordinary low frequency analog circuits, and IGBT power device driving circuits.

These products don't apply to:

- 1) Where the input supply voltage is unfixed (variation  $\geq \pm 10\%$ ), otherwise our company's SWRA series is recommended;
- 2) Circuits in which the output voltage regulation is demanded, otherwise our company's SIA Series or SWRA Series are recommended.
- 3) The output load's actual power consumption is less than 1W, otherwise our company's SG\_D-1W series are recommended.

### MODEL SELECTION

SH0505D-1W

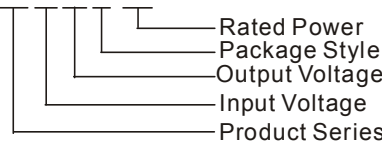

### PRODUCT PROGRAM

Part Number	Input		Output			Efficiency (% Typ)	Certificate		
	Voltage (VDC)		Voltage (VDC)	Current (mA)					
	Nominal	Range		Max	Min				
SH0505D-1W	5	4.5~5.5	5	200	20	70	UL		
SH0509D-1W			9	111	12	72	UL		
SH0512D-1W			12	84	9	73	UL		
SH0515D-1W			15	67	7	74	UL		
SG0505D-1W			+5	+100	+10	70	UL		
SG0509D-1W			+9	+56	+6	71	UL		
SG0512D-1W			+12	+42	+5	72	UL		
SG0515D-1W			+15	+33	+4	73	UL		
SH1205D-1W			12	10.8~13.2	5	200	20	70	UL
SH1209D-1W					9	111	12	71	UL
SH1212D-1W	12	84			9	72	UL		
SH1215D-1W	15	67			7	74	UL		
SG1205D-1W	+5	+100			+10	70	UL		
SG1209D-1W	+9	+56			+6	71	UL		
SG1212D-1W	+12	+42			+5	72	UL		
SG1215D-1W	+15	+33			+4	75	UL		

Note: The SG\_D-W2/SH\_D-W2 series also are available in our company.

### COMMON SPECIFICATIONS

Item	Test Conditions	Min	Typ	Max	Units
Operating temperature		-40		85	°C
Storage temperature		-55		125	
Storage humidity range				95	%
Short circuit protection	5V input voltage	1 second(Max)			
	12V input voltage	Continuous			
Cooling	Free air convection				
Temp. rise at full load			15	30	°C
Lead temperature	1.5mm from case for 10 seconds		300		
Isolation voltage	Tested for 1 minute and 1mA max	6000			VDC
Isolation resistance	Test at 1000VDC	1000			MΩ
MTBF		3500			K Hours
Case material		Plastic(UL94-V0)			
Weight			8.2		g

## OUTPUT SPECIFICATIONS

Item	Test conditions	Min	Typ	Max	Units
Output power		0.1		1	W
Line regulation	For Vin change of 1%			±1.2	%
Load regulation	10% to 100% load	5V output	10	15	%
		9V output	8.3	15	
		12V output	6.8	15	
		15V output	6.3	15	
Output voltage accuracy	See tolerance envelope graph				
Temperature drift	100% full load			0.03	%/°C
Ripple & Noise*	20MHz Bandwidth		150	200	mVp-p
Switching frequency	Full load, nominal input	5V input	250		KHz
		12V input	50		

\*Test ripple and noise by "parallel cable" method. See detailed operation instructions at Testing of Power Converter section, application notes.


Note:

1. All specifications measured at TA=25°C, humidity<75%, nominal input voltage and rated output load unless otherwise specified.


2. Dual output models unbalanced load: ±5%.

## TYPICAL CHARACTERISTICS


Tolerance Envelope Graph

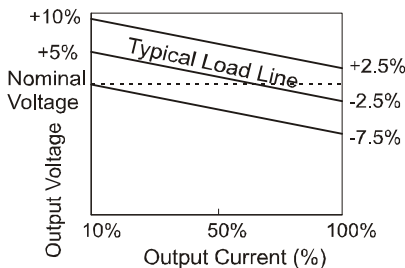

Temperature Derating Graph

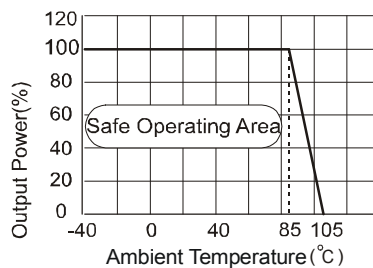


## OUTLINE DIMENSIONS & PIN CONNECTIONS

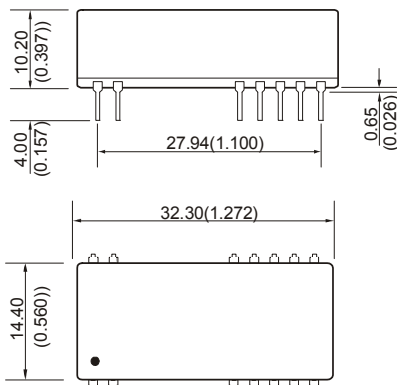

Note:  
Unit: mm (inch)  
Pin section: 0.50\*0.30mm (0.020\*0.012inch)  
Pin tolerances: ±0.10mm (±0.004inch)  
General tolerances: ±0.25mm (±0.010inch)

First Angle Projection  
RECOMMENDED FOOTPRINT  
Top view, grid: 2.54mm (0.1inch), diameter: 1.00mm

FOOTPRINT DETAILS




FOOTPRINT DETAILS

Pin	Single	Dual
1	Vin	Vin
2	GND	GND
8, 17	NC	-Vo
10, 15	OV	OV
12, 13	+Vo	+Vo
Others	NC	NC

## Recommended testing and application circuit

If you want to further decrease the input/output ripple, an "LC" filtering network may be connected to the input and output ends of the DC/DC converter, see (Figure 1).

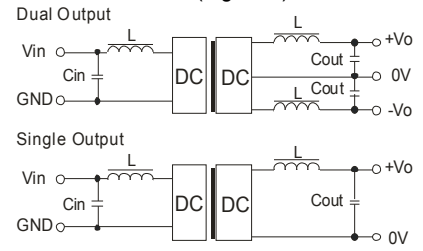

(Figure 1)

It should also be noted that the inductance and the frequency of the "LC" filtering network should be staggered with the DC/DC frequency to avoid mutual interference. However, the capacitance of the output filter capacitor must be proper. If the capacitance is too big, a startup problem might arise. For every channel of output, provided the safe and reliable operation is ensured, the greatest capacitance of its filter capacitor sees (Table 1).

EXTERNAL CAPACITOR TABLE


Vin (VDC)	Cin (uF)	Single Vout (VDC)	Cout (uF)	Dual Vout (VDC)	Cout (uF)
5	4.7	5	10	±5	4.7
12	2.2	9	4.7	±9	2.2
24	1	12	2.2	±12	1
-	-	15	1	±15	1

(Table 1)

It's not recommend to connect any external capacitor in the application field with less than 0.5 watt output.

## Output Voltage Regulation and Over-voltage Protection Circuit

The simplest device for output voltage regulation, over-voltage and over-current protection is a linear voltage regulator with overheat protection that is connected to the input or output end in series (Figure 2).

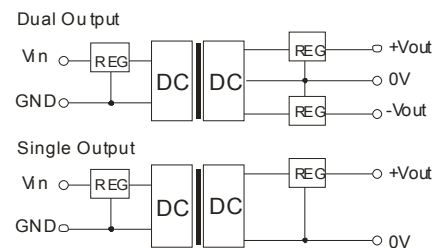

(Figure 2)

## Overload Protection

Under normal operating conditions, the output circuit of these products has no protection against overload. The simplest method is to connect a self-recovery fuse in series at the input end or add a circuit breaker to the circuit.

No parallel connection or plug and play.

## APPLICATION NOTE

### Requirement on output load

To ensure this module can operate efficiently and reliably, During operation, the minimum output load is **not less than 10%** of the full load, and that **this product should never be operated under no load!** If the actual output power is very small, please connect a resistor with proper resistance at the output end in parallel to increase the load, or use our company's products with a lower rated output power.