

SCHMID-M

SKHWS Series 80W WIDE INPUT RANGE



FEATURES

- 80W DIL PACKAGE
- INDUSTRY STANDARD PACKAGE
- 18V-36V,36V-75V WIDE INPUT RANGE
- 100% BURNED IN
- EFFICIENCY UP TO 93%
- UL 94V-0 PACKAGE MATERIAL
- CUSTOM SOLUTIONS AVAILABLE



OUTPUT SPECIFICATIONS

Voltage Setpoint Accuracy	+/-2% max
Over Voltage Protection	Built-in
Temperature Coefficient	+/-0.03%/°C
Ripple & Noise(20MHz BW) ¹	100mVp-p max
Line Regulation ²	+/-0.5% max
Load Regulation ³	+/-0.5% max
Minimum load	10% of Full Load
Short Circuit Protection	Continuous
Short Circuit Restart	Automatic
External Trim Adj. Range	+/-10%
Over Load Protection	150% typ.
Transient Response ⁵	500uS max

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature(80W)	-40°C to +40°C
Operating Temperature(with Heat Sink)(80W)	-40°C to +50°C
Case Temperature	+100°C max
Storage Temperature	-55°C to +100°C
Humidity	95% max
Cooling	Free-Air Convection

INPUT SPECIFICATIONS

Input Voltage Range	2:1
Input Filter	Pi Network
Protection	Fuse Recommended
OVLO(Over Voltage Lockout)	See Page 3
UVLO(Under Voltage Lockout)	See Page 3
OVLO & UVLO Circuit Restart	Automatic

GENERAL SPECIFICATIONS

Efficiency	92% typ.
Isolation Voltage ⁴	1500 VDC min
Isolation Resistance	10 ⁹ ohms min
Isolation Capacitance	2500pF max
Switching Frequency	250KHz typ.
Weight	67g typ.
Case Material	Six-Side Shielded Case
Case Size	50.8mm*50.8mm*11mm
Potting Material	Epoxy(UL94-V0)
Conducted Emissions	EN55022 Class A
Radiated Emissions	EN55022 Class A

ALL SPECIFICATIONS TYPICAL AT NOMINAL LINE, FULL LOAD , AND 25 °C UNLESS OTHERWISE NOTED.


● **SELECTION GUIDE**
2:1 80W OUTPUT

MODEL NUMBER	INPUT VOLTAGE (VDC)	OUTPUT VOLTAGE (VDC)	OUTPUT CURRENT (mA)	INPUT ⁸ CURRENT(mA)		EFF (%) ⁹	CAPACITOR LOAD (Max)
				FULL LOAD	NO LOAD		
SKHWS-2405-80W(HS)	18-36	5	16000	3623	100	92	1000uF
SKHWS-2412-80W(HS)	18-36	12	6666	3623	100	92	220uF
SKHWS-2415-80W(HS)	18-36	15	5333	3623	100	92	100uF
SKHWS-4805-80W(HS)	36-75	5	16000	1812	50	92	1000uF
SKHWS-4812-80W(HS)	36-75	12	6666	1812	50	92	220uF
SKHWS-4815-80W(HS)	36-75	15	5333	1812	50	92	100uF


● **PART NUMBERS STRUCTURE**

Model Name	Difference
SKHWv-x1x2(HS)	<p>SKH=Series Name</p> <p>W=Wide Input Range</p> <p>v=Type of output voltage (S=single output)</p> <p>x1=Input voltage(9~18V ; 18~36V ; 36~75V)</p> <p>x2=Output voltage(03.3 ; 05 ; 12 ; 15)</p> <p>HS=With Heat Sink</p> <p>zzz= 0~9 , A~Z or blank for market purpose.</p>


● **SIMPLIFIED SCHEMATIC**

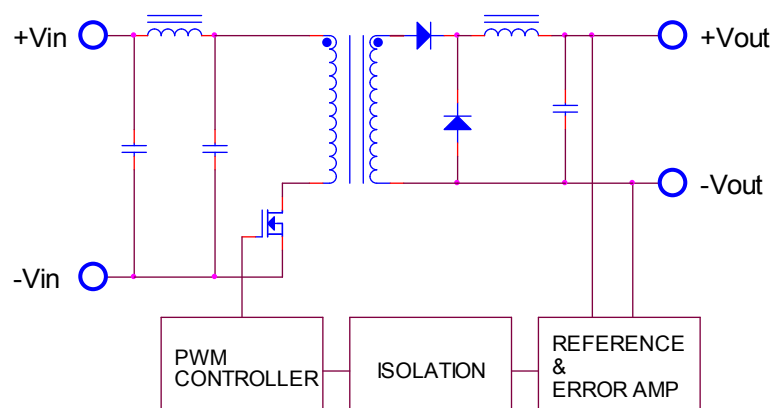

● MECHANICAL DIMENSIONS

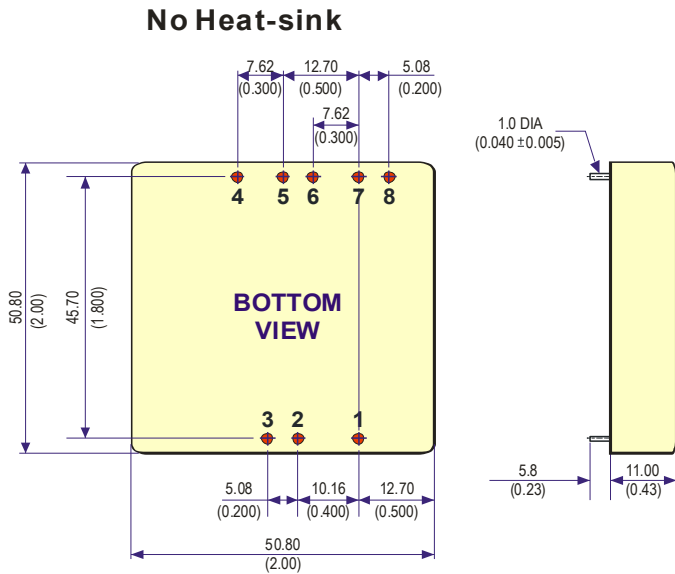

PIN	SINGLE
1	Remote On/Off
2	-Vin
3	+Vin
4	-Sense
5	+Sense
6	+Vout
7	-Vout
8	Trim

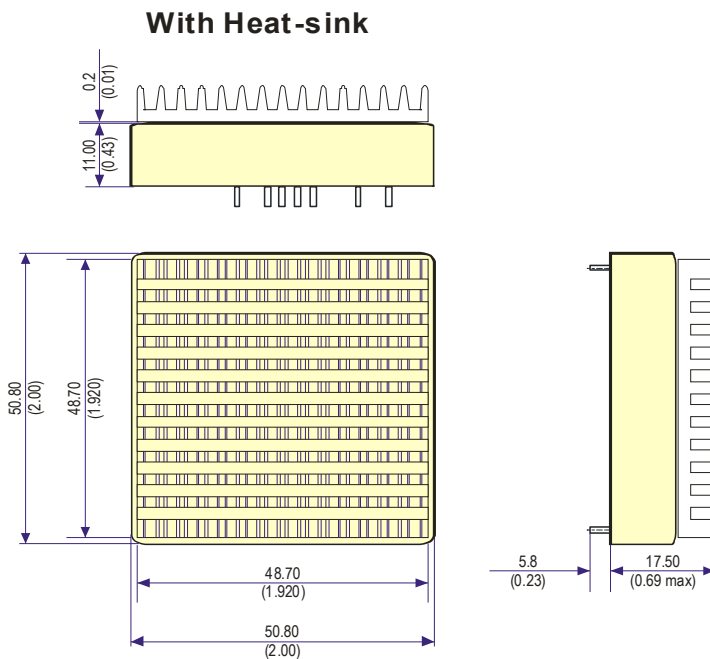

NOTE:

Pin Size is Tolerance

1.0Φ ±0.10mm

All Dimensions In mm(Inches)


Tolerance .X or .XX= ±0.5mm

All dimensions in mm(inches).


Remote On/Off Control			
Control Input	PIN1	Control Common	PIN2
Control Voltage		Converter Shutdown Idle Current	10mA
ON	>+2.5VDC or Open Circuit	Logic Compatibility	CMOS or Open
OFF	<+0.5VDC or Jumper to PIN2		Collector TTL

● TYPICAL APPLICATIONS


FIXED VOLTAGE OUTPUT

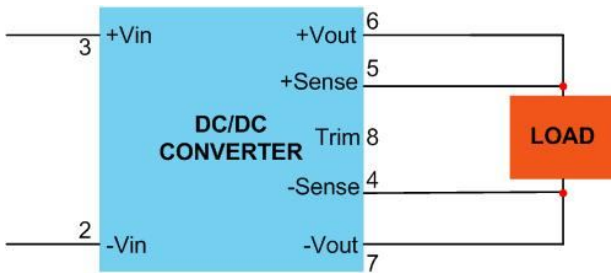


TRIM CONNECTIONS USING A TRIMPOT

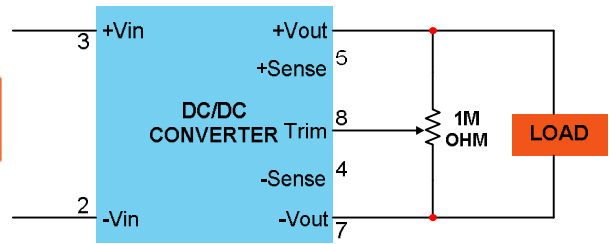


FIXED-VALUE TRIM DOWN RESISTOR

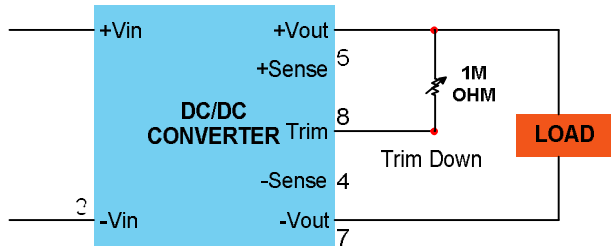

FIXED-VALUE TRIM UP RESISTOR

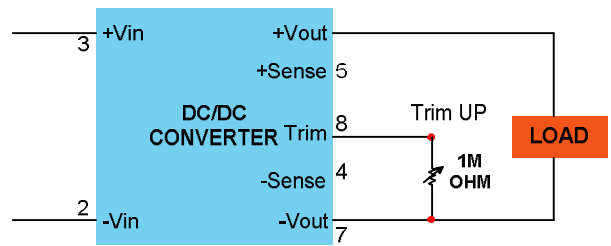


● RECOMMENDED FOOTPRINT DETAILS

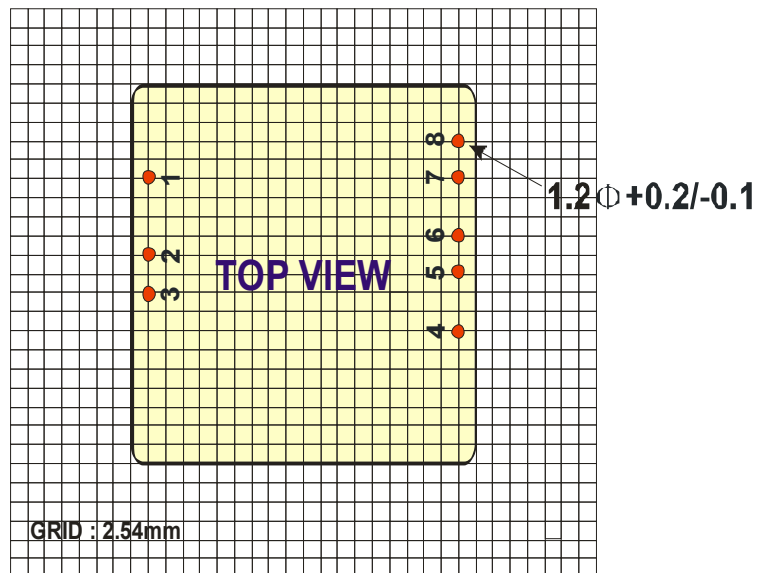


● TYPICAL PERFORMANCE CURVES

Specifications typical at $T_a=25^{\circ}\text{C}$, nominal input voltage, rated output current unless otherwise specified.


OUTPUT LOAD VS EFFICIENCY

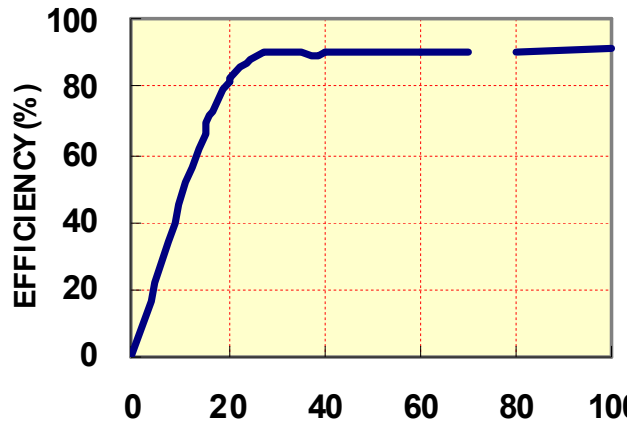

TEMPERATURE DERATING(80W)

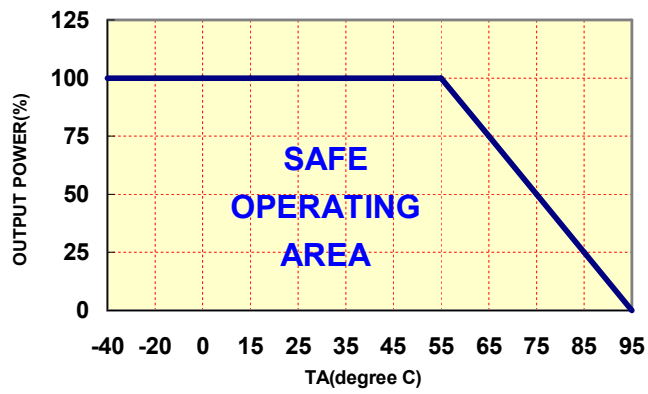

TEMPERATURE DERATING(80W)(With Heat Sink)

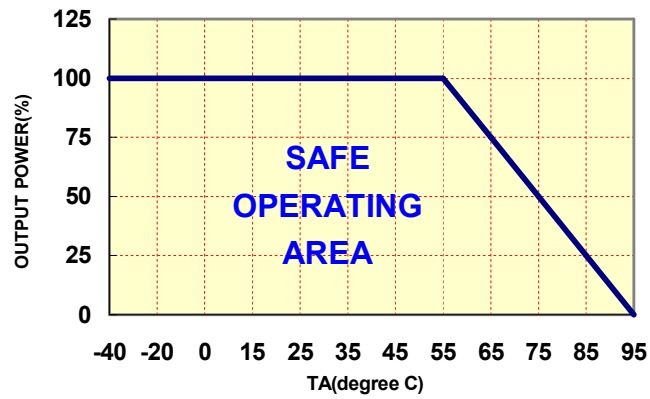

● INPUT FUSE SELECTION GUIDE(80W)

18-36V INPUT VOLTAGE(VDC)	36-75V INPUT VOLTAGE(VDC)
10000mA Slow-Blow Type	5000mA Slow-Blow Type
<div style="display: flex; justify-content: space-between; align-items: center;"> <div style="text-align: center;"> <p>INPUT</p> </div> <div style="text-align: center;"> <p>OUTPUT</p> </div> </div>	

Note: Certain applications may require the installation of external fuse in front of the input.

SKHWS SERIES APPLICATION NOTES:

EXTERNAL CAPACITANCE REQUIREMENTS:

External output capacitance is not required for operation, however it is recommended that 10uF MLCC and 0.1uF ceramic capacitance be selected for reduced system noise.

Additional output capacitance may be added for increased filtering, but should not exceed 1000uF.

Negative Outputs:

A negative output voltage may be obtained by connecting the +OUT to circuit ground and connecting –OUT as the negative output.

Remote ON/OFF:

The remote ON/OFF pin may be left floating if this function is not use. It is recommended to drive this pin with an open collector arrangement or a relay contact. When the ON/OFF pin is pulled low with respect to the –Vin , the converter is placed in a low power drain state.

Output TRIM:

The TRIM pin may be used to adjust the output +/-10% from the nominal setting .this function allows adjustment for voltage drops in the system wiring. If the TRIM function is not required the pin may be left floating.