

SWRE_P-6W & SWRF_P-6W Series

6W, 2:1 WIDE INPUT, ISOLATED & REGULATED DUAL/SINGLE OUTPUT DIP DC-DC CONVERTER



FEATURES

Efficiency up to 86%
Operating Temperature: -40°C to +85°C
3KVDC Input/Output Isolation
Short Circuit Protection(Automatic recovery)
Internal SMD construction
No Heat Sink Required
Industry-Standard Pinout
MTBF>1,000,000 hours
RoHS Compliance

APPLICATIONS


The SWRE_P-6W & SWRF_P-6W Series are specially designed for applications where a wide range input voltage power supplies are isolated from the input power supply in a distributed power supply system on a circuit board.

These products apply to:

- 1) Where the voltage of the input power supply is wide range (voltage ranges \geq 2:1);
- 2) Where isolation is necessary between input and output(Isolation Voltage \leq 3000VDC);
- 3) Where the regulation of the output voltage and the output ripple noise are demanded.

MODEL SELECTION

SWRF2405P-6W

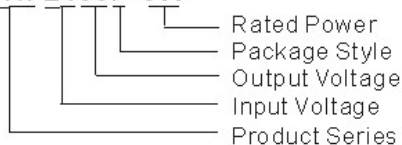

PRODUCT PROGRAM

Part Number	Input			Output			Efficiency (% Typ)
	Voltage (VDC)			Voltage (VDC)	Current (mA)		
	Nominal	Range	Max**		Max	Min	
SWRE0505P-6W *	5	4.5-9	11	±5	±600	±60	76
SWRE0512P-6W *				±12	±250	±25	80
SWRE0515P-6W *				±15	±200	±20	82
SWRF0505P-6W *				5	1200	120	76
SWRF0512P-6W *				12	500	50	80
SWRF0515P-6W *				15	400	40	82
SWRF0524P-6W *				24	250	25	81
SWRE1205P-6W *				12	9-18	20	±5
SWRE1212P-6W *	±12	±250	±25				82
SWRE1215P-6W *	±15	±200	±20				84
SWRF1205P-6W *	5	1200	120				78
SWRF1212P-6W *	12	500	50				82
SWRF1215P-6W *	15	400	40				84
SWRF1224P-6W *	24	250	25				82
SWRE2405P-6W *	24	18-36	40				±5
SWRE2412P-6W *				±12	±250	±25	84
SWRE2415P-6W *				±15	±200	±20	86
SWRF2405P-6W *				5	1200	120	80
SWRF2412P-6W *				12	500	50	84
SWRF2415P-6W *				15	400	40	86
SWRF2424P-6W *				24	250	25	85
SWRE4805P-6W *				48	36-72	80	±5
SWRE4812P-6W *	±12	±250	±25				84
SWRE4815P-6W *	±15	±200	±20				86
SWRF4805P-6W *	5	1200	120				80
SWRF4812P-6W *	12	500	50				84
SWRF4815P-6W *	15	400	40				86
SWRF4824P-6W *	24	250	25				85

* Designing

**Input voltage can't exceed this value, or will cause the permanent damage.

Note:The load shouldn't be less than 10%,otherwise ripple will increase dramatically.

Operation under 10% load will not damage the converter; However, they may not meet all specification listed.

OUTPUT SPECIFICATIONS

Item	Test Conditions	Min	Typ	Max	Units
Output Power	See below products program	0.6		6	W
Positive Voltage Accuracy	Refer to recommended circuit		±1	±3	%
Negative Voltage Accuracy	Refer to recommended circuit		±3	±5	
Load Regulation	From 10% To 100% load		±0.5	±1*	
Line Regulation(at full load)	Input voltage from low to high		±0.2	±0.5	
Temperature Drift(Vout)	Refer to recommended circuit		0.02		%/°C
Ripple**	20MHz bandwidth		20	50	mVp-p
Noise**	20MHz bandwidth		75	150	
Switching Frequency	100% load, nominal Input voltage		300		KHz

* Dual output models unbalanced load: ±5%.

**Test ripple and noise by "parallel cable" method. See detailed operation instructions at Testing of Power Converter section, application notes.


COMMON SPECIFICATION

Item	Test Conditions	Min	Typ	Max	Units
Storage humidity				95	%
Operating temperature		-40		85	°C
Storage temperature		-55		125	
Temp. rise at full load			40		
Lead temperature	1.5mm from case for 10 seconds			300	
Isolation voltage	Tested for 1 minute and 1mA max	3000			VDC
Isolation resistance	Test at 500VDC	1000			MΩ
No-load power consumption			500		mW
Cooling		Free air convection			
Short circuit protection		Continuous, automatic recovery			
Case material		Plastic (UL94-V0)			
MTBF		1000			K hours
Weight			17		g


Note:

- All specifications measured at $T_A=25^{\circ}\text{C}$, humidity<75%, nominal input voltage and rated output load unless otherwise specified.
- See below recommended circuits for more details.

TYPICAL CHARACTERISTICS

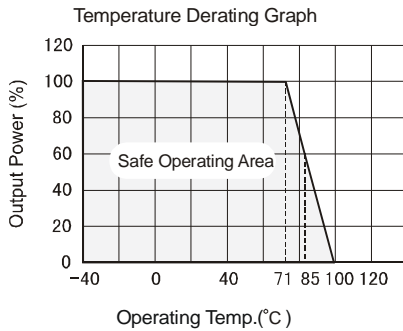

OUTLINE DIMENSIONS & PIN CONNECTIONS


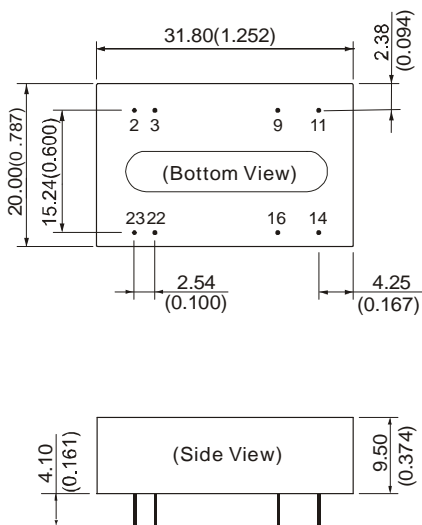


Note:

- Unit:mm(inch)
 Pin diameter:0.50mm(0.020inch)
 Pin diameter tolerances:±0.05mm(±0.002inch)
 General tolerances:±0.25mm(±0.010inch)

First Angle Projection

RECOMMENDED FOOTPRINT
 Top view, grid:2.54mm(0.1inch),
 diameter:1.00mm(0.039inch)



FOOTPRINT DETAILS

Pin	Single	Dual
2,3	GND	GND
9	No Pin	0V
11	NC	-Vo
14	+Vo	+Vo
16	0V	0V
22,23	Vin	Vin

NC:No Connection


APPLICATION NOTE

Requirement Output Load

In order to ensure the product operate efficiently and reliably, in addition to a max load (namely full load), a minimum load is specified for this kind of DC/DC converter. Make sure the specified range of input voltage is not exceeded, the minimum output load no less than 10% load. If the actual load is less than the specified minimum load, the output ripple may increase sharply while its efficiency and reliability will reduce greatly. If the actual output power is very small, please add an appropriate resistor as extra loading, or contact our company for other lower output power products.

Recommended Circuit

All the SWRE_P-6W&SWRF_P-6W Series have been tested according to the following recommended testing circuit before leaving factory. This series should be tested under load. Never be tested under no load (see Figure 1).

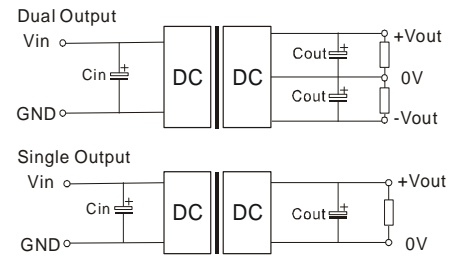

(Figure 1)


If you want to further decrease the output ripple, you can increase capacitance properly or choose capacitors with low ESR. However, the capacitance should not be too high (Table 1).

External Capacitor Table(Table 1)

Vin (VDC)	Cin (uF)	Single Vout (VDC)	Cout (uF)	Dual Vout (VDC)	Cout (uF)
5	100	5	1000	±5	680
12	100	12	470	±12	470
24	10-47	15	330	±15	330
48	10-47	24	220	±24	220

Input Current

When it is used in unregulated power supply, be sure that the fluctuating range of the power supply and the rippled voltage do not exceed the module standard. Input current of power supply should afford the startup current of this kind of DC/DC module. (Figure 2)

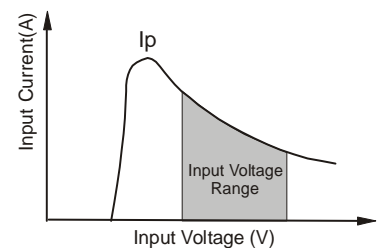

(Figure 2)

No parallel connection or plug and play.