


SCHMID-M

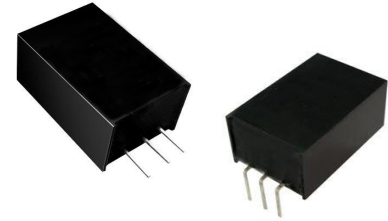

SK78XX-1000(L) Series

WIDE INPUT NON-ISOLATED & REGULATED SINGLE OUTPUT

FEATURES


- Efficiency up to 97%
- Operating temperature: -40°C ~ +85°C
- Pin-out compatible with LM78XX Linear
- Short circuit protection, thermal shutdown
- Low ripple and noise
- Micro miniature SIP package
- No heatsink required
- Industry standard pinout
- MTBF>2,000,000 hours

APPLICATIONS

The SK78xx-1000(L) series high efficiency switching regulators are ideally suited to replace 78xx linear regulators and are pin compatible. The efficiency of up to 97% means that very little energy is wasted as heat so there is no need for any heatsinks with their additional space and mounting costs.

MODEL SELECTION

SK7805-1000

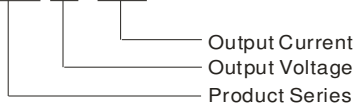

Product Program

Part Number	Input Voltage(VDC)		Output		Efficiency (%) (Typ)	
	Nominal	Range	Voltage (VDC)	Current (mA)	Vin (min.)	Vin (max.)
SK7801-1000(L)	12	4.75-26	1.5	1000	80	71
SK78X2-1000(L)	12	4.75-26	1.8	1000	83	74
SK7802-1000(L)	12	4.75-28	2.5	1000	88	80
SK7803-1000(L)	24	4.75~28	3.3	1000	90	83
SK7805-1000(L)	24	6.5~32	5.0	1000	93	88
SK78X6-1000(L)	24	9.0~32	6.5	1000	94	90
SK7809-1000(L)	24	12~32	9.0	1000	95	92
SK7812-1000(L)	24	16~32	12	1000	96	94
SK7815-1000(L)	24	20~32	15	1000	97	94

Add suffix "L" for 90° bend pins, for example: SK7805-1000L.

Output Specifications


Item	Test conditions	Min.	Typ.	Max.	Units
Output voltage accuracy	100% full load		±2	±3	%
Line regulation	Vin=min. to max. at full load		±0.2	±0.4	
Load regulation*	10% to 100% load		±0.4	±0.6	
Ripple & Noise	20MHz bandwidth (refer to figure 3)		25	35	mVp-p
Short circuit input power**			0.5	1.8	W
Short circuit protection		Continuous, automatic recovery			
Thermal shutdown	Internal IC junction		150		°C
Switching frequency	100% full load	280	330	450	KHz
Output current limit	Vin= min. to max. (at full load)	Vout : 1.5V~3.3V		3000	mA
		Vout : 5V~15V		2000	
Quiescent current			5	8	mA
Temperature coefficient	-40°C ~ +85°C ambient			±0.02	%/°C
Max capacitance load				1000	µF

* SK78X2-1000 is ±0.75%(Max), ** SK7801-1000 is 4W (Max).

COMMON SPECIFICATIONS

Item	Test conditions	Min.	Typ.	Max.	Units
Storage humidity				95	%
Operating temperature	Power derating (above 71°C)	-40		85	°C
Operating case temp.				100	
Storage temperature		-55		125	
Lead temperature	1.5mm from case for 10 seconds			300	
Cooling		Free air convection			
Case material		Plastic (UL94-V0)			
MTBF	25°C (MIL-HDBK-217F)	2000			k hours
Weight			3.7		g


TYPICAL CHARECTERISTICS

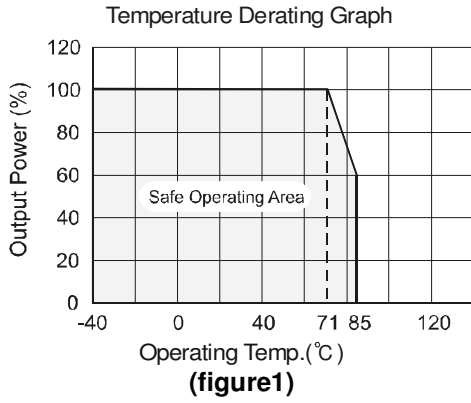

EXTERNAL CAPACITOR TABLE

Part Number	C1 (Ceramic capacitor)	C2 (Ceramic capacitor)
SK7801-1000(L)	10 μ F/50V	22 μ F/6.3V
SK78X2-1000(L)	10 μ F/50V	22 μ F/6.3V
SK7802-1000(L)	10 μ F/50V	22 μ F/6.3V
SK7803-1000(L)	10 μ F/50V	22 μ F/6.3V
SK7805-1000(L)	10 μ F/50V	22 μ F/16V
SK78X6-1000(L)	10 μ F/50V	10 μ F/16V
SK7809-1000(L)	10 μ F/50V	10 μ F/16V
SK7812-1000(L)	10 μ F/50V	10 μ F/25V
SK7815-1000(L)	10 μ F/50V	10 μ F/25V


TYPICAL APPLICATION CIRCUIT

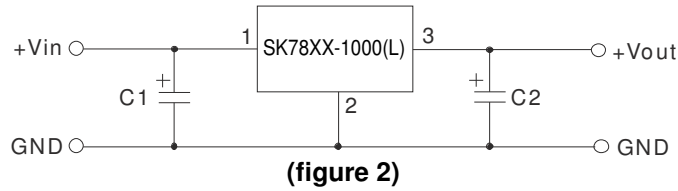


1. C1 and C2 are required and should be fitted close to the converter pins.
2. The capacitance of C1, C2 sees external capacitor table, it can be increased properly if required, and tantalum or low ESR electrolytic capacitors may also suffice.
3. No parallel connection or plug and play.

TEST CONFIGURATIONS (TA=25°C)


1 Efficiency and Output Voltage Ripple Test

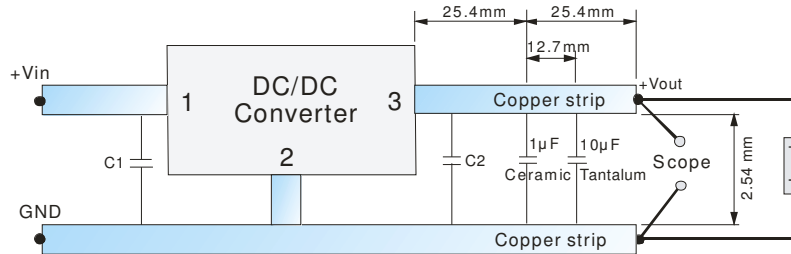

2 Start-up and Load Transient Response Test

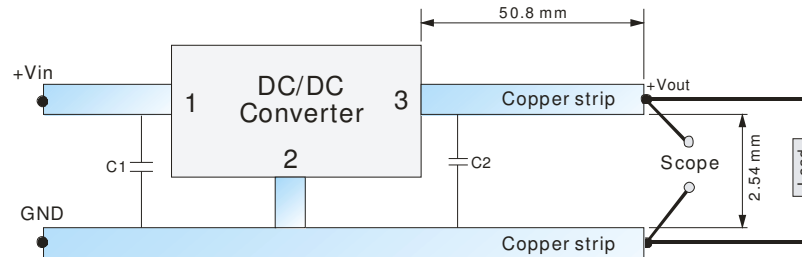

OUTPUT RIPPLE REDUCTION

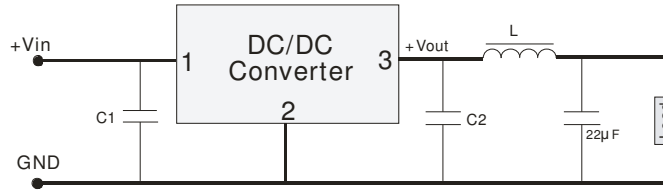


To reduce output ripple, it is recommended to add a LC filter in output port.

L: Recommended parameter $10\mu\text{H} \sim 47\mu\text{H}$.




(figure 5)

CHARACTERISTICS CURVE







Efficiency

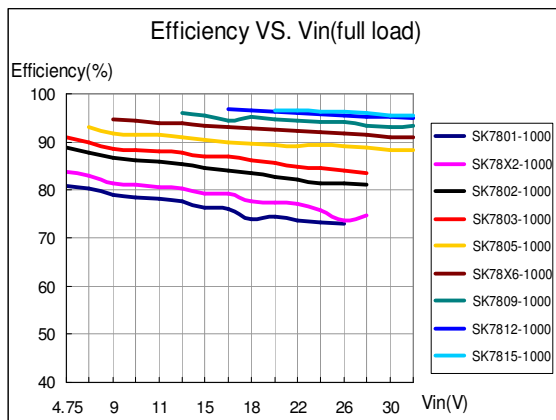

Ripple

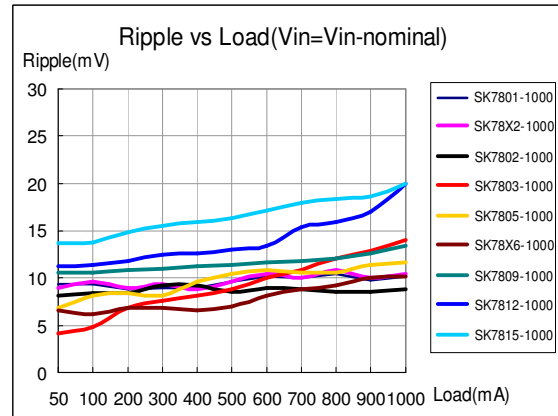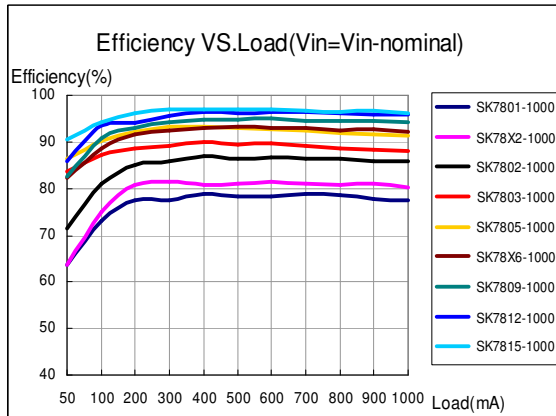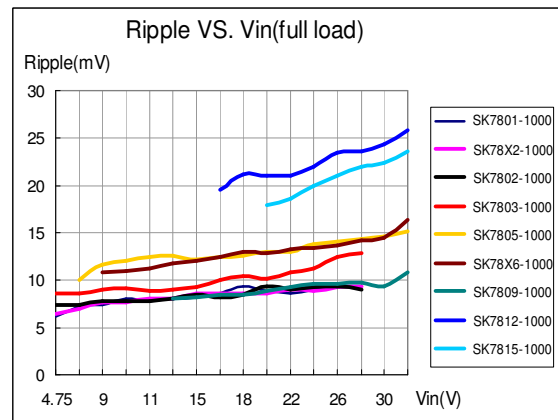

OUTLINE DIMENSIONS & FOOTPRINT DETAILS

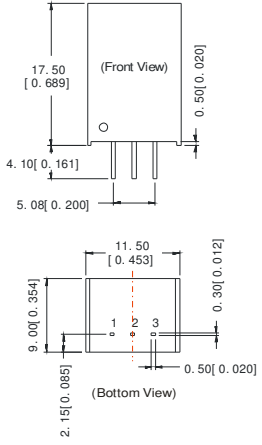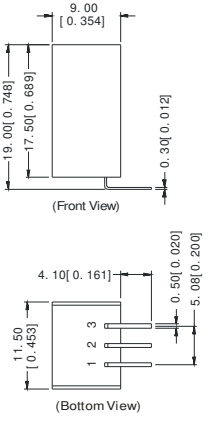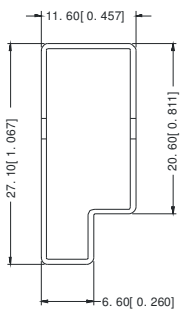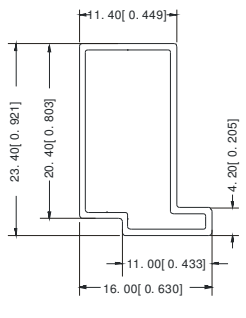MECHANICAL DIMENSIONS	RECOMMENDED FOOTPRINT										
<p>SK78XX</p>  <p>SK78XX-L</p>  <table border="1" style="margin-left: auto; margin-right: auto; border-collapse: collapse; text-align: center;"> <thead> <tr> <th colspan="2">FOOTPRINT DETAILS</th> </tr> <tr> <th>Pin</th> <th>Function</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>+Vin</td> </tr> <tr> <td>2</td> <td>GND</td> </tr> <tr> <td>3</td> <td>+Vout</td> </tr> </tbody> </table> <p>Note: Unit:mm[inch] Pin section tolerances:±0.10mm[±0.004inch] General tolerances:±0.25mm[±0.010inch]</p>	FOOTPRINT DETAILS		Pin	Function	1	+Vin	2	GND	3	+Vout	<p>SK78XX</p>  <p>SK78XX-L</p>  <p>Note: grid 2.54*2.54mm.</p>
FOOTPRINT DETAILS											
Pin	Function										
1	+Vin										
2	GND										
3	+Vout										
TUBE OUTLINE DIMENSIONS											
<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>SK78XX</p>  </div> <div style="text-align: center;"> <p>SK78XX-L</p>  </div> </div> <p>Note: Unit:mm[inch] General tolerances:±0.50mm[±0.020inch] L=530mm[20.866inch] Devices per tube quantity: 44pcs L=220mm[8.661inch] Devices per tube quantity: 17pcs Short tube inner packaging dimensions: L*W*H=255*170*80mm Short tube outer packaging dimensions(with six inner packaging boxes): L*W*H=375*280*270mm Long tube inner packaging dimensions: L*W*H=580*200*100mm Long tube outer packaging dimensions(with two inner packaging boxes): L*W*H=600*215*220mm Long tube outer packaging dimensions(with three inner packaging boxes): L*W*H=600*215*325mm</p>											

Note:

1. All specifications measured at Ta=25°C, humidity<75%, nominal input voltage and rated output load unless otherwise specified.
2. In this datasheet, all the test methods of indications are based on corporate standards.