

# SCHMID-M


## SVRA\_D-10W & SVRB\_D-10W Series

### 10W, 2:1 WIDE INPUT ISOLATED & REGULATED DUAL/SINGLE OUTPUT DC-DC CONVERTER



#### PART NUMBER SYSTEM

SVRA 2405D-10W

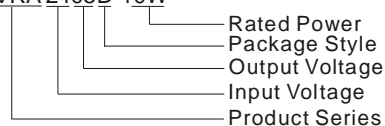

#### FEATURES

- Efficiency up to 86%
- Wide input range(2:1)
- Operating temperature: -40°C to +85°C
- 1.5KVDC isolation
- Metal shielding package
- Industry standard pinout
- MTBF>1,000,000 hours
- Good high temperature properties, can meet the industrial products technical requirements

#### APPLICATIONS

The SVRA\_D-10W & SVRB\_D-10W Series are specially designed for applications where a wide range input voltage power supplies are isolated from the input power supply in a distributed power supply system on a circuit board.

These products apply to:

- 1) Where the voltage of the input power supply is wide range (voltage ranges $\geq$ 2:1);
- 2) Where isolation is necessary between input and output(Isolation Voltage  $\leq$  1500VDC);
- 3) Where the regulation of the output voltage and the output ripple noise are demanded.

#### SELECTION GUIDE

Model Number	Input Voltage(VDC)		Output Voltage (VDC)	Output Current (mA)		Input Current (mA)(typ.)		Reflected Ripple Current (mA,typ.)	Max. Capacitive Load <sup>#</sup> (μF)	Efficiency (% , typ.) @Max. Load
	Nominal (Range)	Max*		Max.	Min.	@Max. Load	@No Load			
SVRA1205D-10W	12 (9-18)	20	±5	±1000	±100	985	30	50	100	82
SVRA1212D-10W			±12	±420	±42	948			47	83
SVRA1215D-10W			±15	±330	±33	937			47	84
SVRA1224D-10W			±24	±210	±21	950			22	84
SVRB1205D-10W			5	2000	200	968			100	80
SVRB1212D-10W			12	830	83	939			100	82
SVRB1215D-10W			15	667	66	970			100	82
SVRB1224D-10W			24	420	42	926			47	83
SVRA2405D-10W			24 (18-36)	40	±5	±1000			±100	494
SVRA2412D-10W	±12	±420			±42	473	47	85		
SVRA2415D-10W	±15	±330			±33	492	47	84		
SVRA2424D-10W	±24	±210			±21	496	22	85		
SVRB2405D-10W	5	2000			200	505	100	83		
SVRB2409D-10W	9	1111			111	487	100	83		
SVRB2412D-10W	12	830			83	470	100	85		
SVRB2415D-10W	15	667			66	451	100	84		
SVRB2424D-10W	24	420			42	471	47	85		
SVRA4805D-10W	48 (36-75)	80	±5	±1000	±100	243	5	100	100	83
SVRA4812D-10W			±12	±420	±42	229			47	86
SVRA4815D-10W			±15	±330	±33	236			47	86
SVRA4824D-10W			±24	±210	±21	231			22	86
SVRB4805D-10W			5	2000	200	247			100	83
SVRB4812D-10W			12	830	83	231			100	86
SVRB4815D-10W			15	667	66	237			100	86
SVRB4824D-10W			24	420	42	231			47	86

Note: 1.\*Input voltage can't exceed this value, or will cause the permanent damage.

2. Models listed with strike-through text have been officially discontinued.

3. <sup>#</sup> For each output.

**INPUT SPECIFICATIONS**

Item	Test Conditions	Min.	Typ.	Max.	Unit
Input Surge Voltage (1000 ms)	12VDC Input Models	-0.7	--	25	VDC
	24VDC Input Models	-0.7	--	50	
	48VDC Input Models	-0.7	--	100	
Start-up Voltage	12VDC Input Models	--	--	9	
	24VDC Input Models	--	--	18	
	48VDC Input Models	--	--	36	
Under Voltage Shutdown	12VDC Input Models	--	--	9	
	24VDC Input Models	--	--	18	
	48VDC Input Models	--	--	36	
Start-up Time	Nominal input & constant resistance load	--	10	--	ms
Short Circuit Input Power		--	--	3.5	W
No-load power consumption		--	500	--	mW
Input Filter		L Filter			

**OUTPUT SPECIFICATIONS**

Item	Test Conditions	Min.	Typ.	Max.	Unit
Output Power		1	--	10	W
Positive voltage accuracy	Refer to recommended circuit	--	±1	±3	%
Negative voltage accuracy		--	±3	±5	
Output Voltage Balance	Dual Output, Balanced Loads	--	±0.5	±1	
Line Regulation	For Vin change of ±1%	--	±0.2	±0.5	
Load Regulation	10% to 100% load	--	±0.5	±1	
Cross Regulation	Dual output	--	--	±5	
Transient Recovery Time	25%~50%~25% rated load or	--	200	500	
Transient Response Deviation	50%~75%~50% rated load range	--	±3	±5	%
Temperature Drift	100% full load	--	--	±0.03	%/°C
Ripple *	20MHz Bandwidth	--	30	50	mVp-p
Noise *		--	100	300	
Over Current Protection	Full input voltage	120	--	--	%
Short Circuit Protection		Continuous, automatic recovery			

Note: Dual output models unbalanced load: ±5%.  
\*Test ripple and noise by "parallel cable" method. See detailed operation instructions at Testing of Power Converter section, application notes.

**COMMON SPECIFICATIONS**

Item	Test Conditions	Min.	Typ.	Max.	Unit
Isolation Voltage	Tested for 1 minute and leakage current less than 1 mA	1500	--	--	VDC
Isolation Resistance	Test at 500VDC	1000	--	--	MΩ
Isolation Capacitance	Input/Output, 100KHz/0.1V	--	1000	--	pF
Switching Frequency	Full load, nominal input	--	300	--	KHz
MTBF	MIL-HDBK-217F @25°C	1000	--	--	K hours
Case Material		Aluminium alloy			
Weight		--	23.5	--	g


**ENVIRONMENTAL SPECIFICATIONS**

Item	Test Conditions	Min.	Typ.	Max.	Unit
Storage Humidity		--	--	95	%
Operating Temperature	Power derating (above 71°C)	-40	--	85	°C
Storage Temperature		-55	--	125	
Temp. rise allowed at full load	Operating Temperature curve range	--	75	--	
Lead Temperature	1.5mm from case for 10 seconds	--	--	300	
Cooling		Free air convection			

## EMC SPECIFICATIONS

EMI	CE	CISPR22/EN55022 CLASSB (External Circuit Refer to Figure1-②)		
	ESD	IEC/EN61000-4-2 Contact ±4KV perf. Criteria B		
EMS	EFT	IEC/EN61000-4-4 ±2KV		perf. Criteria B(External Circuit Refer to Figure1-①)
	Surge	IEC/EN61000-4-5 ±2KV		perf. Criteria B(External Circuit Refer to Figure1-①)

## EMC RECOMMENDED CIRCUIT

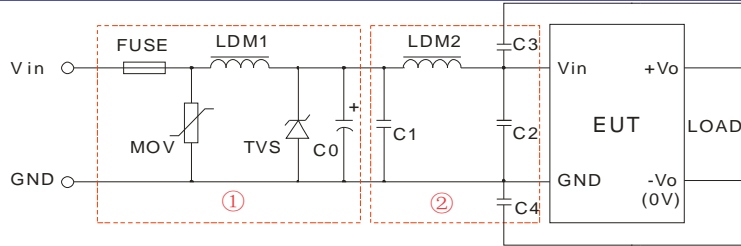

(Figure1)

SVRA\_D-10W Recommended external circuit parameters:


Model		Vin: 12V	Vin: 24V	Vin: 48V
EMS	FUSE	Choose according to practical input current		
	MOV	--	10D560K	10D101K
	LDM1	--	56μH	56μH
	TVS	SMCJ28A	SMCJ48A	SMCJ90A
	C0	680μF/25V	120μF/50V	120μF/100V
EMI	C1	1μF/50V	1μF/50V	1μF/100V
	LDM2	12μH	12μH	12μH
	C2	4.7μF/50V	4.7μF/50V	4.7μF/100V
	C3	--	--	100pF/2KV
	C4	--	--	100pF/2KV

SVRB\_D-10W Recommended external circuit parameters:

Model		Vin: 12V	Vin: 24V	Vin: 48V
EMS	FUSE	Choose according to practical input current		
	MOV	--	10D560K	10D101K
	LDM1	--	56μH	56μH
	TVS	SMCJ28A	SMCJ48A	SMCJ90A
	C0	680μF/25V	120μF/50V	120μF/100V
EMI	C1	1μF/50V	1μF/50V	1μF/100V
	LDM2	12μH	12μH	12μH
	C2	4.7μF/50V	4.7μF/50V	4.7μF/100V






Note: 1. In Figure 1, part①is EMS Recommended external circuit, part②is EMI recommended external circuit. Choose according to requirements.  
2. If there is no recommended parameters, the model no require the external component.

## EMC RECOMMENDED CIRCUIT PCB LAYOUT

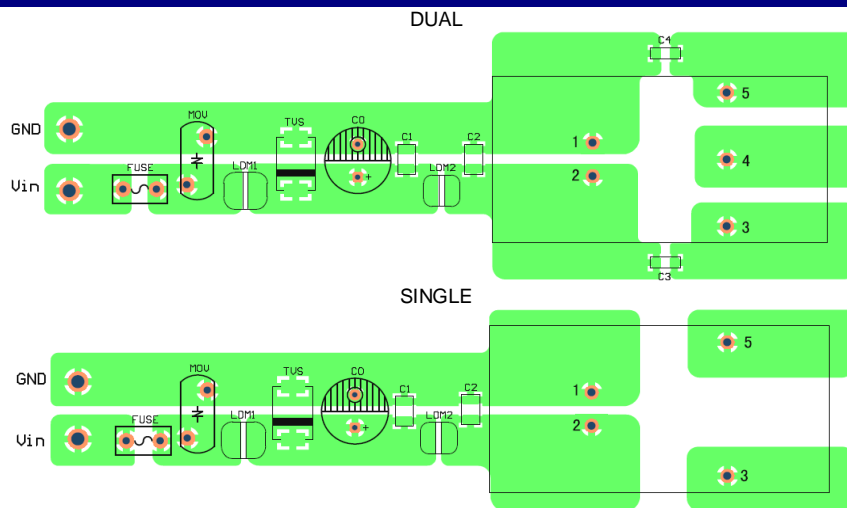

(Figure 2)

# PRODUCT TYPICAL CURVE

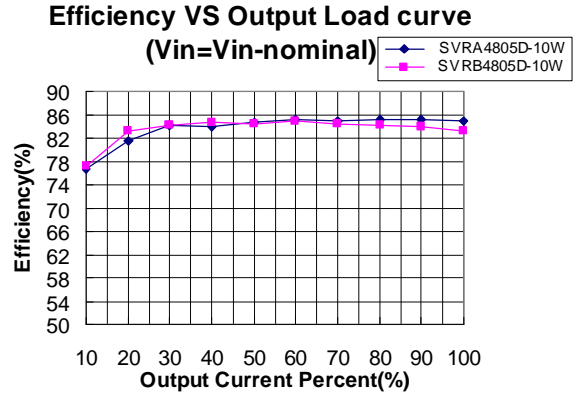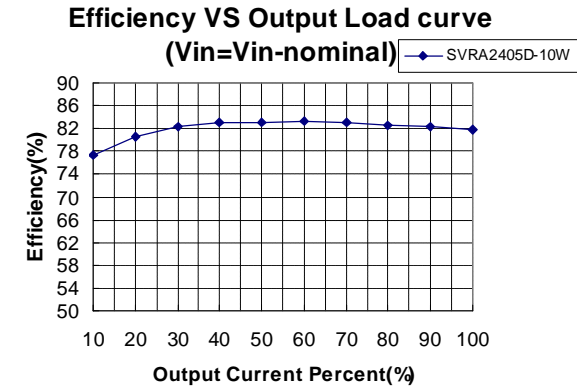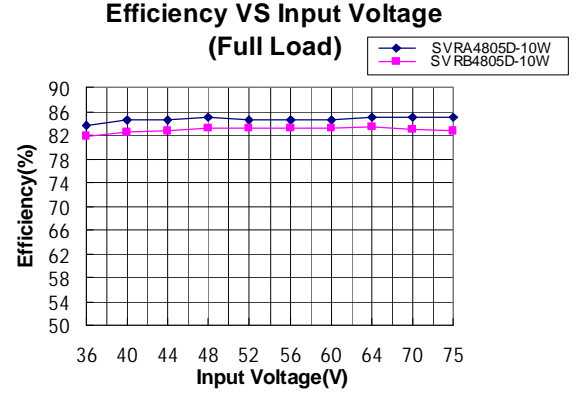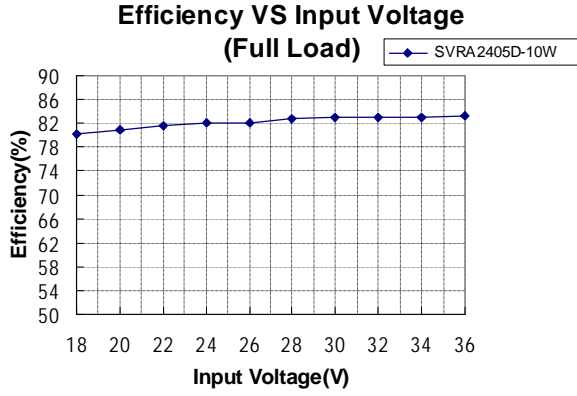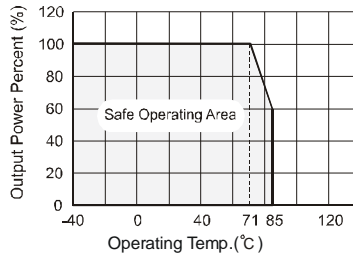

# OUTLINE DIMENSIONS, RECOMMENDED FOOTPRINT & PACKAGING

### MECHANICAL DIMENSIONS

Front View dimensions: 11.20 [0.441], 4.10 [0.161], 20.32 [0.800],  $\varnothing 0.80 [0.031]$

Bottom View dimensions: 50.80 [2.000], 3°, 5°, 5.08 [0.200], 20.32 [0.800], 25.40 [1.000]

Pin	Single	Dual
1	GND	GND
2	Vin	Vin
3	+Vo	+Vo
4	No Pin	0V
5	0V	-Vo

Note:  
Unit: mm[inch]  
Pin diameter tolerances:  $\pm 0.10\text{mm} [\pm 0.004\text{inch}]$   
General tolerances:  $\pm 0.50\text{mm} [\pm 0.020\text{inch}]$

### RECOMMENDED FOOTPRINT

DUAL

SINGLE

Note: grid 2.54\*2.54mm.


### TUBE OUTLINE DIMENSIONS

Note:  
Unit: mm[inch]  
General tolerances:  $\pm 0.50\text{mm} [\pm 0.020\text{inch}]$   
L=220mm[8.661inch] pcs/tube: 7pcs  
Inner packaging dimensions: 255\*170\*80mm  
Outer packaging dimensions(with six inner packaging boxes): 375\*280\*270mm

## TEST CONFIGURATIONS

### Input Reflected-Ripple Current Test Setup

Input reflected-ripple current is measured with an inductor  $L_{in}$  and  $C_{in}$  to simulate source impedance.

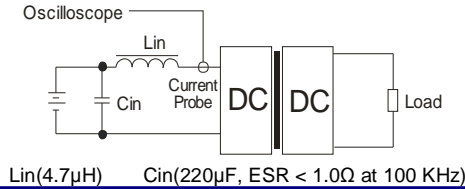

## DESIGN & APPLY CONSIDERATIONS


### 1) Requirement on output load

To ensure this module can operate efficiently and reliably, During operation, the minimum output load **could not be less than 10% of the full load**. If the actual output power is very small, please connect a resistor with proper resistance at the output end in parallel to increase the load, or use our company's products with a lower rated output power.

### 2) Recommended circuit

All the SVRA\_D-10W& SVRB\_D-10W Series have been tested according to the following recommended testing circuit before leaving factory. This series should be tested under load. Never be tested under no load (see Figure 3).

If you want to further decrease the output ripple, you can increase capacitance properly or choose capacitors with low ESR. However, the capacitance can't exceed the maximum capacitor load in the list (Table 1).

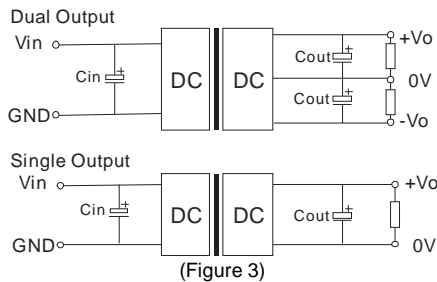


Capacitance		Cout# (μF)	Cin(μF)
Output Voltage			
Single	5V	220	100
	12V,15V	100	
	24V	47	
Dual	±5V	100	
	±12V,±15V	47	
	±24V	22	

Note: # For each output.

### 3) Input Current

When it is used in unregulated power supply, be sure that the fluctuating range of the power supply and the rippled voltage do not exceed the module standard. Input current of power supply should afford the startup current of this kind of DC/DC module. (Figure 4).

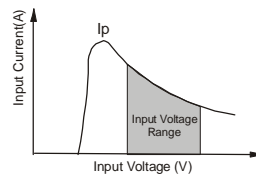

(Figure 4)

### 4) External Capacitor

To ensure this module operate efficiently and reliably, It's recommend to connect external capacitor in the application field.(see table 1)

### 5) No parallel connection or plug and play

Note:

- The load shouldn't be less than 10%, otherwise ripple will increase dramatically. Operation under minimum load will not damage the converter; However, they may not meet all specification listed, and that will reduce the life of product.
- Max. Capacitive Load tested at nominal input voltage, full load and constant resistive load.
- All specifications measured at  $T_a=25^\circ\text{C}$ , humidity<75%, nominal input voltage and rated output load unless otherwise specified.
- In this datasheet, all the test methods of indications are based on corporate standards.
- Only typical models listed, other models may be different, please contact our technical person for more details.
- Our company offer custom products.
- Specifications subject to change without notice.