

DC/DC Converter

SURA(B)_LD-15WR2 & SURA(B)_LD-20WR2 Series



15W&20W, Ultra wide input isolated & regulated
dual / single output DC/DC converter



Patent Protection RoHS  

FEATURES

- | Wide range of input voltage (4:1)
- | Efficiency up to 90%
- | Isolation voltage :1.5K VDC
- | Output over-voltage, over-current, Short circuit protection
- | Operating temperature range: -40°C to +85°C
- | Six-sided metal shielding package
- | International standard pin-out
- | Meet CISPR22/EN55022 CLASS A
- | A2S (wring mounting) and A4S (35mm rail mounting) products featuring anti-reverse connection for input
- | Meet UL60950 and EN60950



SURA(B)_LD-15WR2 & SURA(B)_LD-20WR2 series are applied to wide voltage range input situation such as data transmission device, battery power supply device, telecommunication device, distributed power supply system, remote control system, industrial robot system etc.

Selection Guide

Certification	Part No. ①	Input Voltage (VDC)		Output		Efficiency ③(%Typ.) @ Full Load	Max. Capacitive Load④(μF)		
		Nominal (Range)	Max.②	Output Voltage (VDC)	Output Current (mA)(Max./Min.)				
CE	SURA2405LD-15WR2	24 (9-36)	40	±5	±1500/±75	86	4800		
	SURA2412LD-15WR2			±12	±625/±32	88	800		
	SURA2415LD-15WR2			±15	±500/±25	88	500		
	SURB2403LD-15WR2			3.3	4000/200	87	10200		
	SURB2405LD-15WR2			5	3000/150	90	4020		
	SURB2412LD-15WR2			12	1250/63	89	1035		
	SURB2415LD-15WR2			15	1000/50	89	705		
	SURB2424D-15WR2			24	625/31	90	470		
	SURA4805LD-15WR2			48 (18-75)	80	±5	±1500/±75	86	4800
SURA4812LD-15WR2	±12	±625/±32	88			800			
SURA4815LD-15WR2	±15	±500/±25	89			500			
SURB4803LD-15WR2	3.3	4000/200	87			10200			
SURB4805LD-15WR2	5	3000/150	89			4020			
SURB4812LD-15WR2	12	1250/63	88			1035			
SURB4815LD-15WR2	15	1000/50	90			705			
CE	SURA2405LD-20WR2	24 (9-36)	40			±5	±2000/±100	86	4800
	SURA2412LD-20WR2					±12	±834/±42	88	800
	SURA2415LD-20WR2			±15	±667/±33	88	625		
	SURB2403LD-20WR2			3.3	5000/250	86	18700		
	SURB2405LD-20WR2			5	4000/200	90	9600		

DC/DC Converter

SURA(B)_LD-15WR2 & SURA(B)_LD-20WR2 Series

Selection Guide

Certification	Part No. ①	Input Voltage (VDC)		Output		Efficiency ③(%Typ.) @ Full Load	Max. Capacitive Load④(μF)
		Nominal (Range)	Max.②	Output Voltage (VDC)	Output Current (mA)(Max./Min.)		
CE	SURB2409LD-20WR2	24 (9-36)	40	9	2222/111	88	4700
	SURB2412LD-20WR2			12	1667/84	89	1600
	SURB2415LD-20WR2			15	1333/67	90	1000
	SURB2424LD-20WR2			24	834/42	90	500
	SURA4805LD-20WR2	48 (18-75)	80	±5	±2000/±100	86	4800
	SURA4812LD-20WR2			±12	±834/±42	88	800
	SURA4815LD-20WR2			±15	±667/±33	89	625
UL/CE	SURB4803LD-20WR2	48 (18-75)	80	3.3	5000/250	86	18700
	SURB4805LD-20WR2			5	4000/200	90	9600
	SURB4812LD-20WR2			12	1667/84	89	1600
	SURB4815LD-20WR2			15	1333/67	90	1000
	SURB4824LD-20WR2			24	834/42	90	500

Note:
 ①Series with suffix "H" are heat sink mounting; series with suffix "A2S" are chassis mounting, with suffix "A4S" are DIN-Rail mounting, for example SURB2405LD-15WHR2A2S is chassis mounting of with heat sink, SURB2405LD-15WHR2A4S is DIN-Rail mounting of without heat sink; If the application has a higher requirement for heat dissipation, you can choose modules with heat sink;
 ②Absolute maximum rating without damage on the converter, but it isn't recommended;
 ③The efficiency of A2S (wiring type) and A4S (rail type) products is 2% lower than the above-mentioned value due to the reverse connection protection for input;
 ④ The capacitive loads of positive and negative outputs are identical.

Input Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit	
Input Current (full load / no-load)	15W	24VDC input	3.3/5 VDC output	--	695/45	--	mA
			Others output	--	703/15	--	
		48VDC input	3.3/5 VDC output	--	351/35	--	
			Others output	--	347/10	--	
	20W	24VDC input	3.3/5 VDC output	--	916/60	--	
			Others output	--	937/15	--	
		48VDC input	3.3/5 VDC output	--	463/35	--	
			Others output	--	463/10	--	
Reflected Ripple Current	24VDC/48VDC input		--	30	--		
Input impulse Voltage (1sec. max.)	24VDC input		-0.7	--	50	VDC	
	48VDC input		-0.7	--	100		
Input Filter	Pi filter						
Starting Time	Nominal input& constant resistance load		--	10	--	ms	
Ctrl*	Module switch on		Ctrl suspended or connected to TTL high level (2.5-12VDC)				
	Module switch off		Ctrl pin connected to GND or low level (0-1.2VDC)				
	Input current when switched off		--	1	--	mA	

Note: * the voltage of Ctrl pin is relative to input pin GND.

Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Positive Voltage Accuracy		--	±1	±3	%
Negative Voltage Accuracy					
Balance of Output Voltage	Dual output, balanced load	--	±0.5	±1	
Line Regulation	Full load, the input voltage is from low voltage to high voltage	--	±0.2	±0.5	

DC/DC Converter

SURA(B)_LD-15WR2 & SURA(B)_LD-20WR2 Series

Load Regulation	5%-100% load	--	±0.5	±1	%
Cross Regulation	Dual output, main circuit with 50% load, auxiliary circuit with 10%-100% load	--	--	±5	
Transient Recovery Time	25% load step change	--	300	500	µs
Transient Response Deviation		--	±3	±5	%
Temperature Drift Coefficient	Full load	--	±0.02	--	%/°C
Ripple & Noise *	20MHz bandwidth	--	70	100	mV p-p
Trim		--	±10%Vo	--	VDC
Output Over-voltage Protection	3.3VDC output	--	3.9	--	
	5VDC output	--	6.2	--	
	9VDC output	--	10.8	--	
	12VDC output	--	15	--	
	15VDC output	--	18	--	
	24VDC output	--	30	--	
Output Over-current Protection	Input voltage range	--	160	--	%
Output Short circuit Protection		Hiccup, Continuous, self-recovery			

Note: * Ripple and noise tested with "parallel cable" method, please see *DC-DC Converter Application Notes* for specific operation methods.

General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit	
Isolation Voltage	Input-output, with the test time of 1 minute and the leak current lower than 1mA	1500	--	--	VDC	
Isolation Resistance	Input-output, isolation voltage 500VDC	1000	--	--	MΩ	
Isolation Capacitance	Input-output, 100KHz/0.1V	24VDC output	--	2000	--	pF
		Others	--	1000	--	
Operating Temperature	Derating if the temperature is ≥71°C (see Fig. 1)	-40	--	85	°C	
Storage Temperature		-55	--	125		
Storage Humidity	Non-condensing	5	--	95	%RH	
Max. Operating Temperature for casing	Within the operating temperature curve	--	--	105	°C	
Pin Welding Resistance Temperature	Welding spot is 1.5mm away from the casing, 10 seconds	--	--	300		
Vibration		10-55Hz, 10G, 30 Min. along X, Y and Z				
Switching Frequency	PWM mode	--	300	--	KHz	
MTBF	MIL-HDBK-217F@25°C	1000	--	--	K hours	

Physical Specifications

Casing Material		Aluminum alloy		
Package Dimensions	Without heat sink	Horizontal package	50.80*25.40*11.80mm	
		A2S wiring package	76.00*31.50*21.20 mm	
		A4S rail package	76.00*31.50*25.80 mm	
	With heat sink	Horizontal package	50.80*25.40*16.30mm	
		A2S wiring package	76.00*31.50*25.10 mm	
		A4S rail package	76.00*31.50*29.70 mm	
Weight	Without heat sink	Horizontal package/A2S wiring package/A4S rail package		28.00g/50.00g/70.00g(Typ.)
	With heat sink	Horizontal package/A2S wiring package/A4S rail package		36.00g/58.00g/78.00g(Typ.)
Cooling Method		Free air convection		

DC/DC Converter

SURA(B)_LD-15WR2 & SURA(B)_LD-20WR2 Series

EMC Specifications

EMI	Conducted disturbance	CISPR22/EN55022 CLASS A (Bare component)/ CLASS B (see Fig.3-② for recommended circuit)		
	Radiated emission	CISPR22/EN55022 CLASS A (Bare component)/ CLASS B (see Fig.3-② for recommended circuit)		
EMS	Electrostatic discharge	IEC/EN61000-4-2	Contact $\pm 4KV$	perf. Criteria B
	Radiation immunity	IEC/EN61000-4-3	10V/m	perf. Criteria A
	EFT	IEC/EN61000-4-4	$\pm 2KV$ (see Fig.3-① for recommended circuit)	perf. Criteria B
	Surge immunity	IEC/EN61000-4-5	$\pm 2KV$ (see Fig.3-① for recommended circuit)	perf. Criteria B
	Conducted disturbance immunity	IEC/EN61000-4-6	3 Vr.m.s	perf. Criteria A
	Immunities of voltage dip, drop and short interruption	IEC/EN61000-4-29	0-70%	perf. Criteria B

Product Characteristic Curve






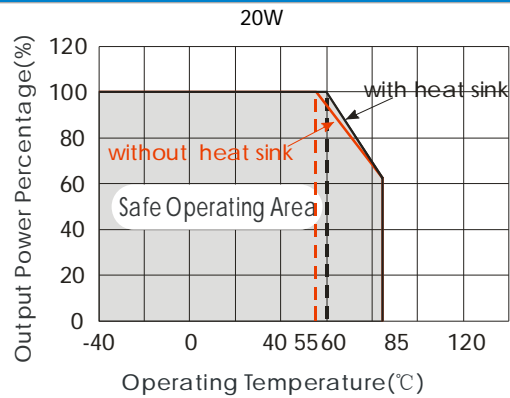


Fig. 1

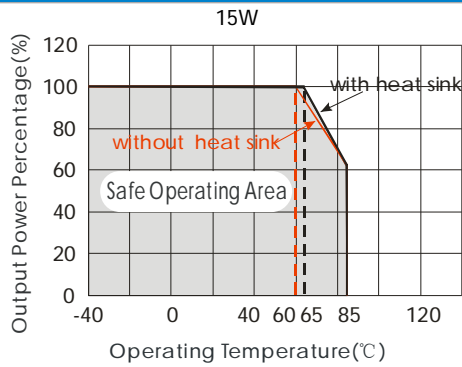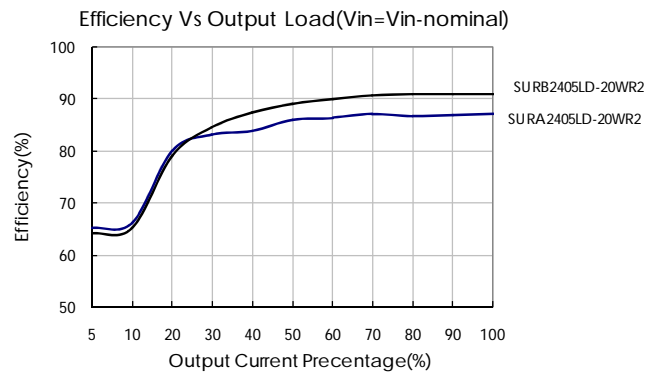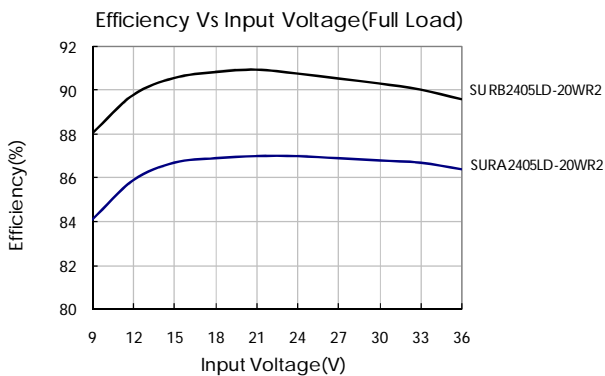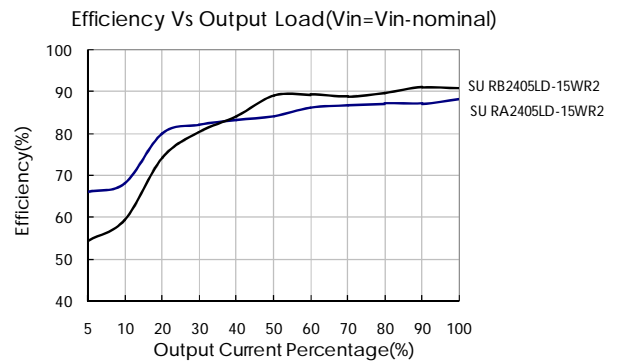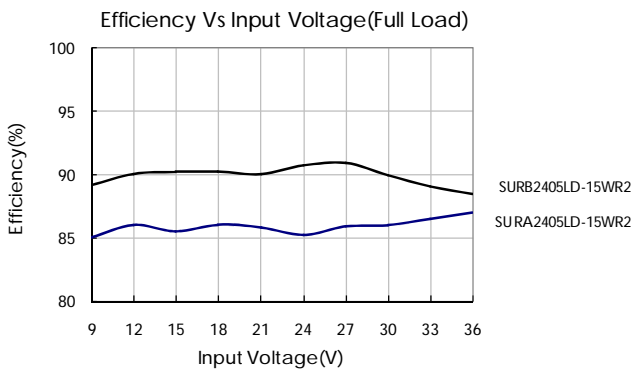

DC/DC Converter


SURA(B)_LD-15WR2 & SURA(B)_LD-20WR2 Series

Design Reference

1. Typical application

All the DC/DC converters of this series are tested according to the recommended circuit (see Fig. 2) before delivery.

If it is required to further reduce input and output ripple, properly increase the input & output of additional capacitors C_{in} and C_{out} or select capacitors of low equivalent impedance provided that the capacitance is no larger than the max. capacitive load of the product.

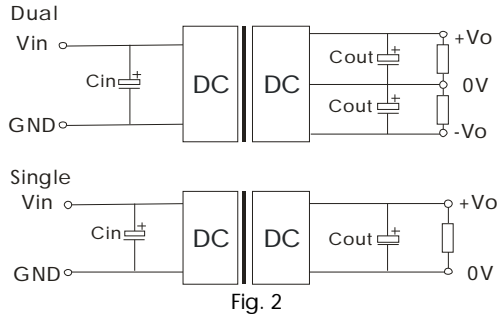

Vout(VDC)		Cin(μF)	Cout(μF)
Dual	±5	100	220
	±12/±15		100
Single	3.3/5	100	470
	9/12/15		220
	24		100

2. EMC solution-recommended circuit

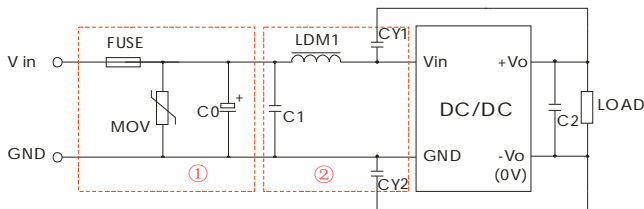


Fig. 3

Notes: Part ① in the Fig. 3 is used for EMS test and part ② for EMI filtering; selected based on needs.

Parameter description

Model	Vin:24V	Vin:48V
FUSE	Choose according to actual input current	
MOV	S14K35	S14K60
C0	330μF/50V	330μF/100V
C1	1μF/50V	1μF/100V
C2	Refer to the Cout in Fig.2	
LDM1	4.7μH	
CY1, CY2	1nF/2KV	

EMC solution-recommended circuit PCB layout


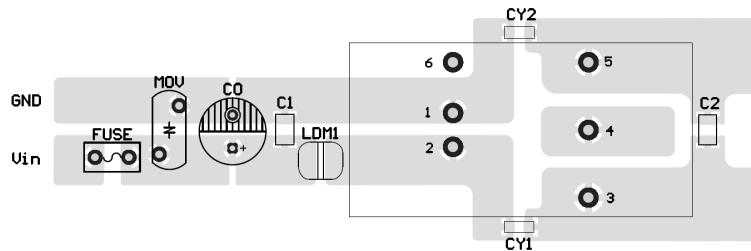


Fig. 4

Note: the min. distance of the bonding pads between input & output isolation capacitors (CY1/CY2) shall be ≥ 2mm.

1. Application of Trim and calculation of Trim resistance

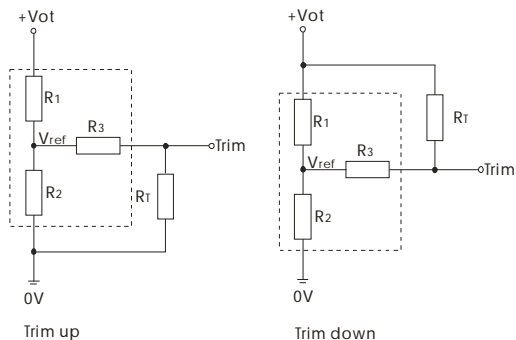

Applied circuits of Trim (Part in broken line is the interior of models)

Calculation formula of Trim resistance:

$$\begin{aligned} \text{up: } R_T &= \frac{aR_2}{R_2-a} - R_3 & a &= \frac{V_{ref}}{V_o' - V_{ref}} \cdot R_1 \\ \text{down: } R_T &= \frac{aR_1}{R_1-a} - R_3 & a &= \frac{V_o' - V_{ref}}{V_{ref}} \cdot R_2 \end{aligned}$$

Note: Leave open if not used. R_T : Resistance of Trim. a : User-defined parameter, no actual meanings.


DC/DC Converter

SURA(B)_LD-15WR2 & SURA(B)_LD-20WR2 Series

Vout(V)	R1(K Ω)	R2(K Ω)	R3(K Ω)	Vref(V)
3.3	4.801	2.863	15	1.24
5	2.883	2.864	10	2.5
9	7.500	2.864	15	2.5
12	10.971	2.864	17.8	2.5
15	14.497	2.864	17.8	2.5
24	24.872	2.863	20	2.5

- The product does not support output in parallel with power per liter or hot-plug use
- For more information please find the application notes on www.schmid-m.com

Dimensions and Recommended Layout(Without heatsink)

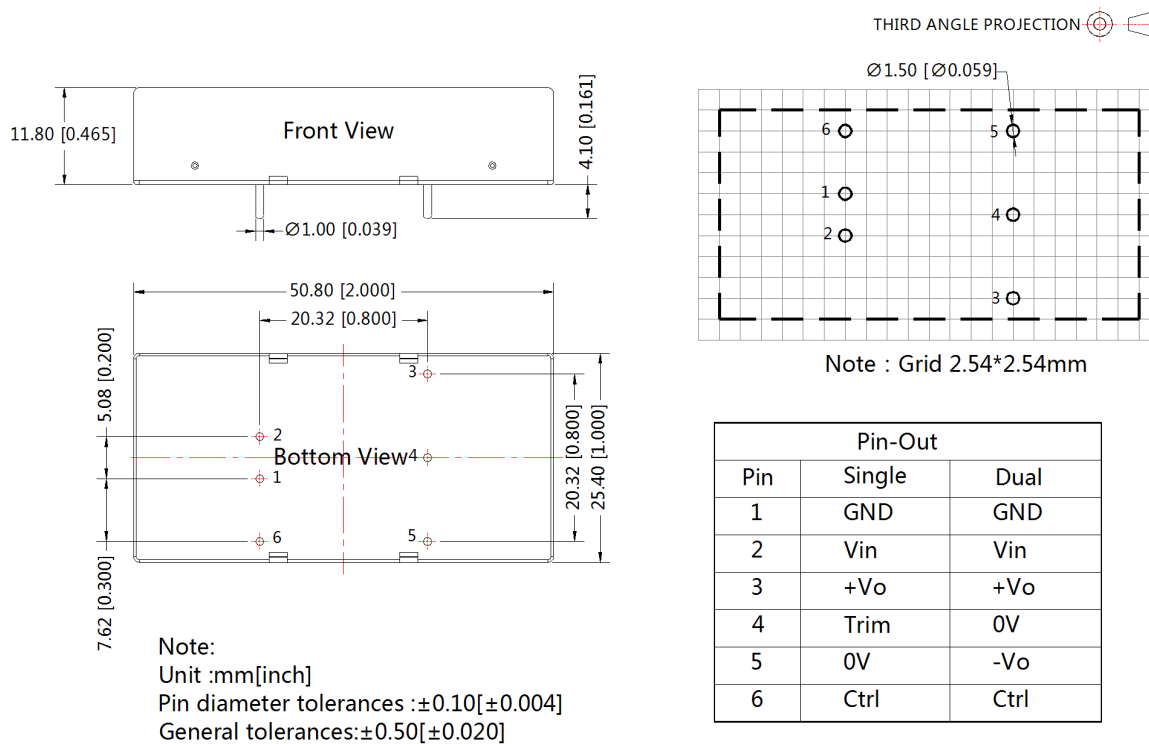


DC/DC Converter

SURA(B)_LD-15WR2 & SURA(B)_LD-20WR2 Series

Dimensions (With heatsink)

THIRD ANGLE PROJECTION 

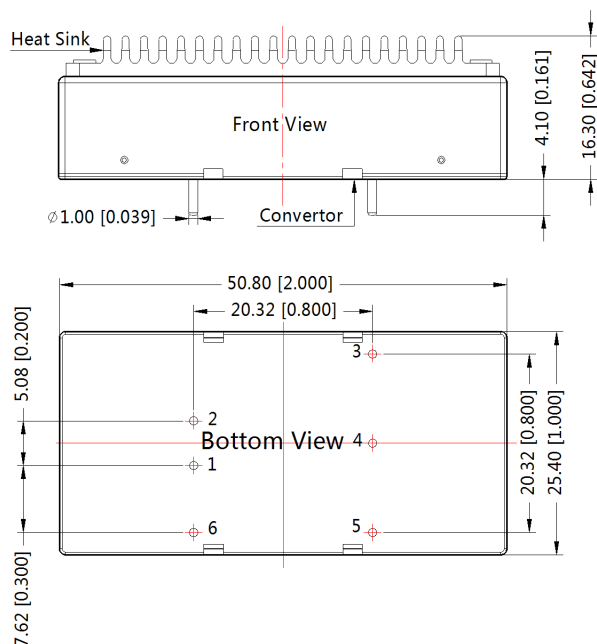


Pin-Out		
Pin	Single	Dual
1	GND	GND
2	Vin	Vin
3	+Vo	+Vo
4	Trim	0V
5	0V	-Vo
6	Ctrl	Ctrl

Note:
 Unit :mm[inch]
 General tolerances: $\pm 0.50[\pm 0.020]$
 If use heatsinks,make sure there is enough space for a special size in ther above graph

A2S Wiring Package Dimensions(Without heatsink)

THIRD ANGLE PROJECTION 

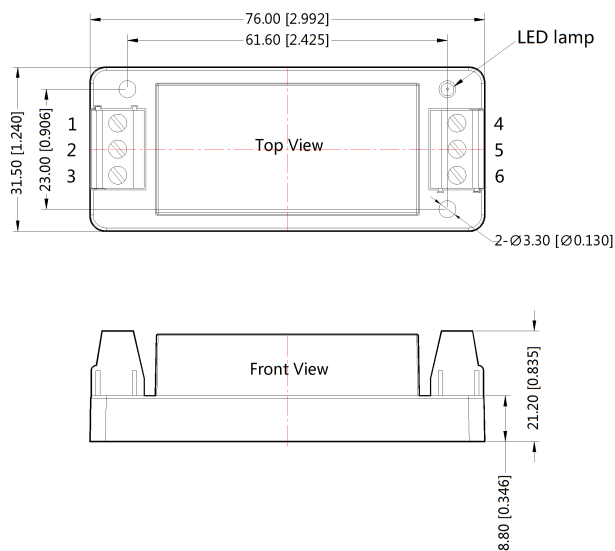


Pin-Out						
Pin	1	2	3	4	5	6
Dual	Ctrl	GND	Vin	-Vo	0V	+Vo
Single	Ctrl	GND	Vin	0V	Trim	+Vo


Note:
 Unit:mm[inch]
 Wire range : 24~12 AWG
 General tolerances: $\pm 0.50[\pm 0.020]$

DC/DC Converter


SURA(B)_LD-15WR2 & SURA(B)_LD-20WR2 Series

A2S Wiring Package Dimensions(With heatsink)

THIRD ANGLE PROJECTION 

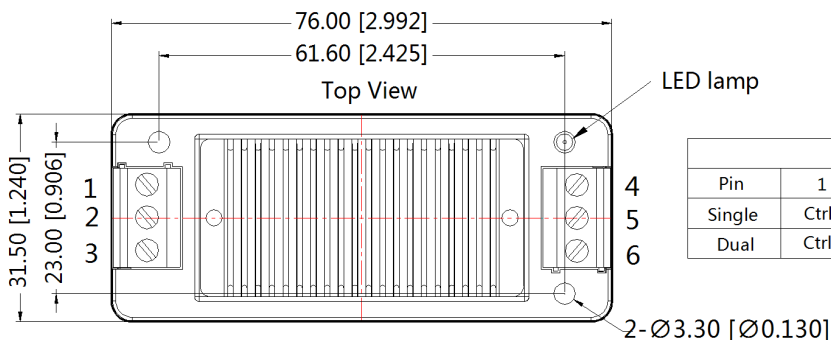


Pin-Out						
Pin	1	2	3	4	5	6
Single	Ctrl	GND	Vin	0V	Trim	+Vo
Dual	Ctrl	GND	Vin	-Vo	0V	+Vo

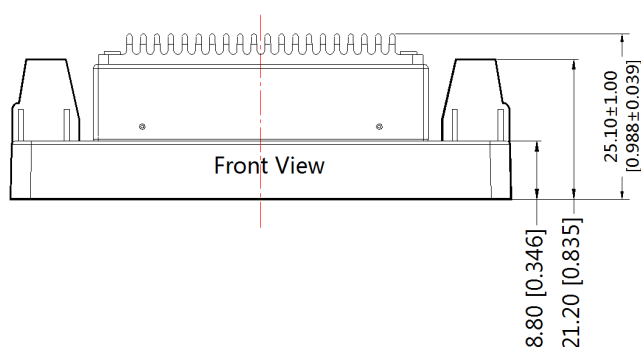


Note:
Unit:mm[inch]
Wire range:24~12 AWG
General tolerances:±0.50[±0.020]

A4S Rail Package Dimensions(Without heatsink)

THIRD ANGLE PROJECTION 

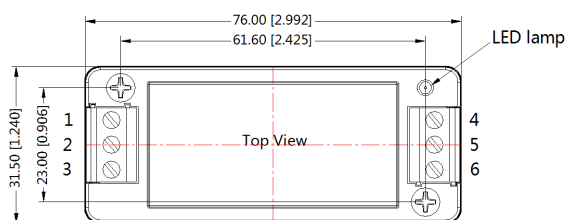

Pin-Out						
Pin	1	2	3	4	5	6
Dual	Ctrl	GND	Vin	-Vo	0V	+Vo
Single	Ctrl	GND	Vin	0V	Trim	+Vo

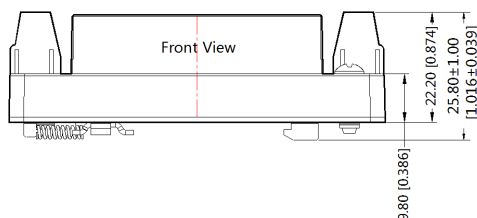


Note:
Unit:mm[inch]
Wire range : 24~12 AWG
General tolerances:±0.50[±0.020]

DC/DC Converter


SURA(B)_LD-15WR2 & SURA(B)_LD-20WR2 Series

A4S Rail Package Dimensions(With heatsink)

THIRD ANGLE PROJECTION 

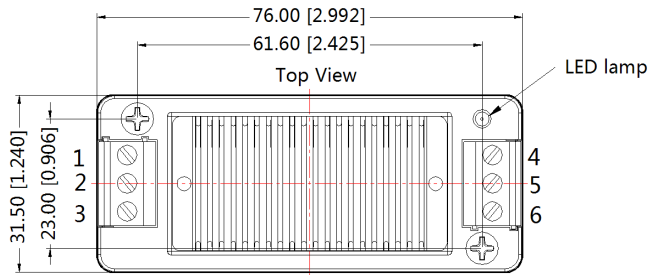

Pin-Out						
Pin	1	2	3	4	5	6
Single	Ctrl	GND	V _{in}	0V	Trim	+V _o
Dual	Ctrl	GND	V _{in}	-V _o	0V	+V _o

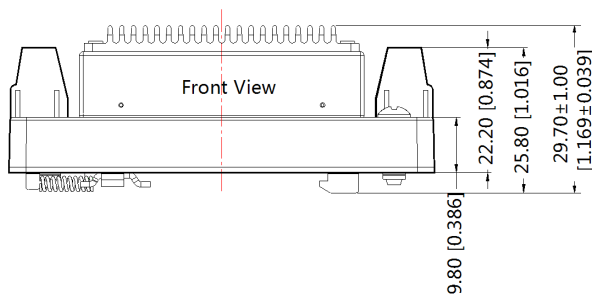

Note:
 Unit:mm[inch]
 Wire range:24~12 AWG
 General tolerances:±0.50[±0.020]

Notes:

1. Packing Information please refer to 'Product Packing Information'. The Packing bag number of Horizontal package: 58200035(without heatsink),58200051(with heatsink), the Packing bag number of A2S/ A4S package: 58220022;
2. Recommended used in more than 5% load, if the load is lower than 5%, then the ripple index of the product may exceed the specification, but does not affect the reliability of the product;
3. The unbalance degree of the recommended dual output module load: ≤ 5%; if the degree exceeds ±5%, then the product performances cannot be guaranteed to comply with all the performance indicators in the manual, and please directly contact our technicians for specific information;
4. The max. capacitive load should be tested within the input voltage range and under full load conditions;
5. Unless otherwise specified, data in this datasheet should be tested under the conditions of Ta=25°C, humidity<75% when inputting nominal voltage and outputting rated load;
6. All index testing methods in this datasheet are based on our Company's corporate standards;
7. The performance indexes of the product models listed in this datasheet are as above, but some indexes of non-standard model products will exceed the above-mentioned requirements, and please directly contact our technicians for specific information;
8. We can provide product customization service;
9. Specifications of this product are subject to changes without prior notice.